Soating Canacity	7 Adults	
Seating Capacity Dimensions		
	(221 cm x 91 cm)	100 :
Dura Walaulat	(221 CHI X 91 CHI)	6 A
Dry Weight		/ 6 5
Filled Weight (Average Fill)		6
Water Capacity (Average Fill)		2 7
Shipping Weight		- 0
Export Shipping Weight:		
Electronic Controls	Programmable digital panel with LED	0 0
	readout	
Pump 1	North America (60 Hz): 2-Speed, 4.0 HP	
	break, 2.5 HP continuous, 48 Frame	
Export (50 Hz):	2-Speed, 2.0 HP continuous	
Circulation Pump	Optional with ClearZone® Pro package	Ontional
Filtration (factory default)		Optional
Heater		escutcheon jets
Export (50Hz)		
Total @Home Jets		
Seat 1 Jets		
	1 Power Storm Twirl, 1 Whirlpool (side wall)	
	1 Power Storm Rotator, 2 Power Storm Twister	
	2 Mini Storm Rifled, 2 Mini Storm Rotator	
Seat 5 Jets		
Seat 6 Jets		
Footwell (7)		
Massage Selectors		
Special Features		
water Management System	One 75 ft ¹ filter cartridge; 8" Weir	
	ClearZone® Pro Water Purification System	
	One multi Color LED footwell light	
Optional		
	Adobe Tan, Stoneridge Grey, Mayan Brown Driftwood, Cherry, Summer Pine, Vintage Ceda	r Midnight Monlo
	UltraLife®, Moonstone, Sand, Sunstone, Smoked Marble, Blue Topaz, Gray Marble, Desert Stone	
Headrests		
Water Feature		
Electrical Requirements:	North America (60 Hz): 240 VAC@30A or 40A	
	Export (50 Hz): 230 VAC@1x16A, 1x32A, 2x16A, 3x16A or suitably	
	rated circuit breaker to comply with local ele	ectrical codes. Certain
countries may require dual power inputs		
Warranty*		
	Shell Surface, 3 Years Plumbing, 3 Years Equipment and Controls,	
	7 Years Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert,	
	1 Year for Jet Escutcheon, 1 Year Lights, 6 Months for Stereo;	
	Export (50 Hz): 10 Years for UltraLife Shell Surface, 5 Years Acrylic	
Shell Surface, 2 Years Plumbing, 2 Years Equipment and Controls,		
2 Years Cabinet, 1 Year Water Purification System, 2 Years for Jet		
	Insert, 1 Year for Jet Escutcheon, 1 Year Lights	
	•	

^{*(}See Warranty Document for Specific Details)

Massage Selector Diagram



DV1 A = Diverter Valve 1 (A position Clockwise)

DV1 B = Diverter Valve 1 (B Position Counter Clockwise)

7 = 31.50" (80.01 cm)


DV1 C=Diverter Valve 1(Neutral Position)

Seat Depths

1 = 24.50" (62.23 cm) 2 = 28.00" (71.12 cm) 3 = 29.50" (74.93 cm) 4 = 27.50" (69.85 cm) 5 = 26.50" (67.31 cm) 6 = 24.50" (62.23 cm) Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance ± 0.5" (1.27 cm).



Jet Designation

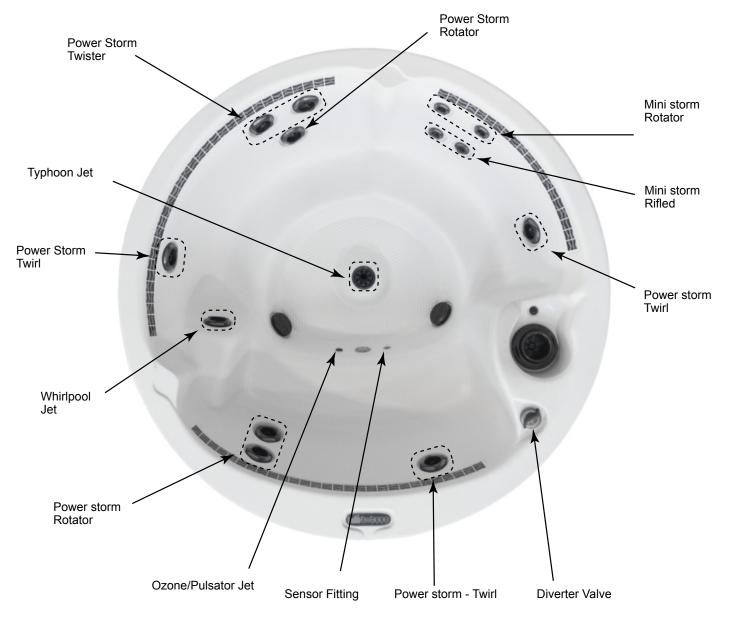

Dimensions/Operation/Specifications are Subject to Change Without Notice

14 Total Jets (textured)

Mini Storm Rifled (2)



Mini Storm Rotator (2)



Power Storm Twirl (3)

Total Jets



Power Storm Rotator (3)



Power Storm Twister (2)




Whirlpool Jet (1)



Typhoon Jet (1)

Front View of Spa

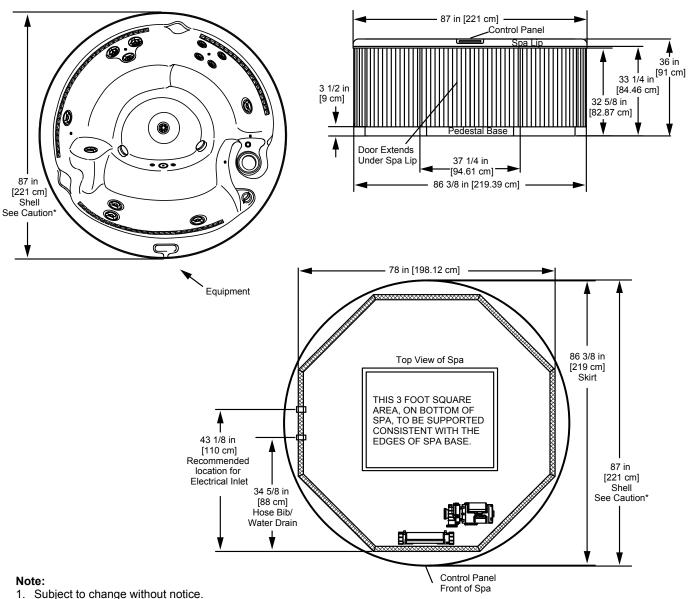

- 2. Engineering specs may differ slightly from brochure.
- 3. For E-Z lifter installation allow 18" (45.7cm) clearance on the backside of the spa.
- 4. Alternative cabinets may add significant weight. Ask your dealer for exact details.
- This is the approximate location for drilling a hole if you must bring the power line in through the bottom of the spa. Be careful not to puncture a plumbing line inside the equipment compartment (drill from the inside compartment out).

STOP

*Caution:

Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. <u>If site planning is critical to such tolerances</u>, be sure to measure your actual spa.