
Seating Capacity Dimensions Dry Weight	78" Diameter x 35", (198 cm Diameter x 89 cm) 500 lbs (227 kg)	3
Filled Weight (Average Fill)	2,500 IDS (1,130 Kg)	a a
Shipping Weight		2
Export Shipping Weight:		9
	Programmable digital panel with LED	
	readout	O
	North America (60 Hz): 2-Speed, 2.5 HP	
	break, 1.5 HP continuous, 48 Frame 2-Speed, 2.0 HP continuous	
Export (50 Hz):	2-Speed, 2.0 HP continuous	
	Optional with ClearZone Pro package	
Filtration (factory default)		Optional
Heater		escutcheon jets
Export (50Hz)	2.U KVV	esculciieon jets
Total @Home Jets	20 3 Mini Storm Rotator, 1 Turbo Jet (sidewall)	
	3 Milli Storm Rotator, 1 Turbo det (sidewaii) 4 Cluster Storm Rifled, 4 Cluster Storm Directional	1
Seat 3 Jets		I.
Seat 4 Jets	3 Mini Storm Directional	
Footwell (5)	2 Mini Storm Directional	
Massage Selectors		
Special Features		
	One 75 ft ² filter cartridge; 8" Weir	
	ClearZone Pro Water Purification System	
	One multi Color LED footwell light	
Optional		
	Adobe Tan, Stoneridge Grey, Mayan Brown	
	Driftwood, Cherry, Summer Pine, Vintage Cedar, N	/lidnight Maple
	Moonstone, UltraLife, Sand, Sunstone, Smoked M	
	Marble, Desert Stone	•
Headrests		
Water Feature		
Electrical Requirements:	North America (60 Hz): 120V@15A or 240 VAC@30A or 40A	
	Export (50 Hz): 230 VAC@1x16A, 1x32A, 2x16A, 3x16A or suitably	
	rated circuit breaker to comply with local electrical codes. Certain	
\A/a	countries may require dual power inputs North America (60 Hz): Lifetime for UltraLife Shell Surface, 5 Years Acrylic	
warranty"	Shell Surface, 3 Years Plumbing, 3 Years Equipment and Controls,	
	7 Years Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert,	
	1 Year for Jet Escutcheon, 1 Year Lights, 6 Months for Stereo;	
	Export (50 Hz): 10 Years for UltraLife Shell Surface, 5 Years Acrylic	
	Shell Surface, 2 Years Plumbing, 2 Years Equipment and Controls,	
	2 Years Cabinet, 1 Year Water Purification System, 2 Years for Jet	
	Insert, 1 Year for Jet Escutcheon, 1 Year Lights	
	moort, i rour for out Escatoricon, i real Eights	•

^{*(}See Warranty Document for Specific Details)

Massage Selector Diagram

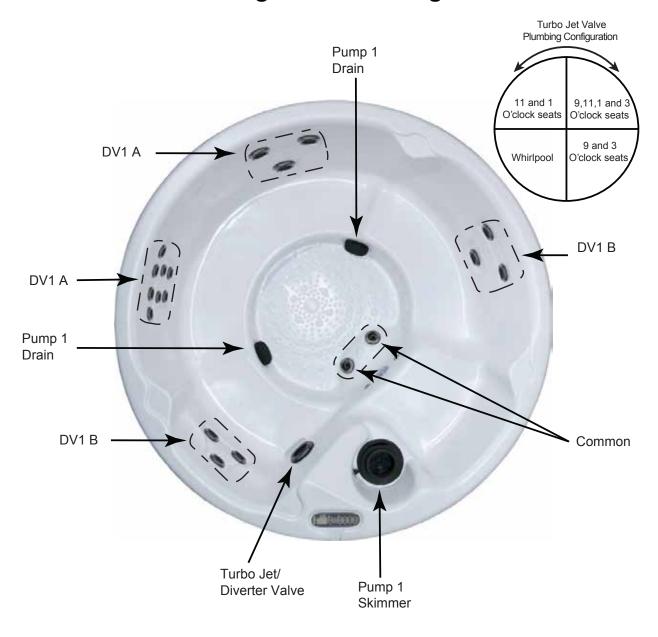

Seat Depths

1 = 25.50" (64.77 cm)

2 = 27.50" (69.85 cm)

3 = 27.50" (69.85 cm)

4 = 25.00" (63.50 cm)

5 = 16.00" (40.64 cm)


6 = 31.00" (78.74 cm)

Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance ± 0.5" (1.27 cm).



Dimensions/Specifications are Subject to Change Without Notice

Jet Designation

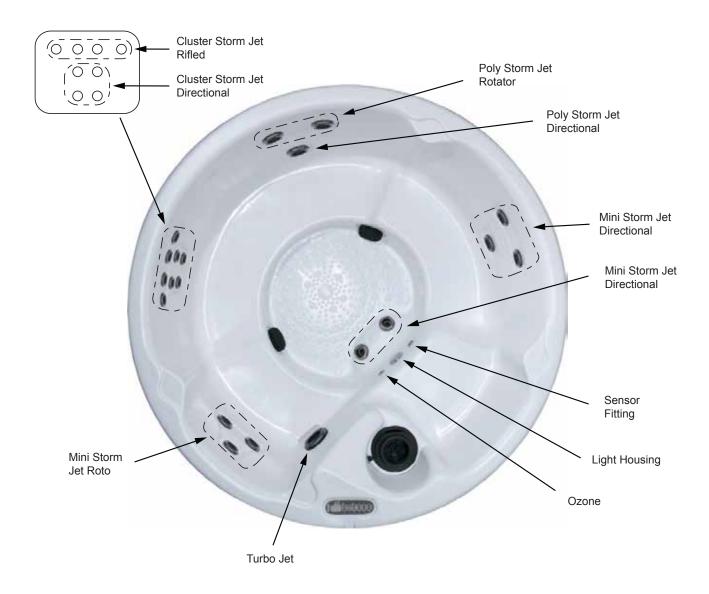

Dimensions/Operation/Specifications are Subject to Change Without Notice

20 Total Jets (textured)



Poly Storm Rifled (3)



Cluster Storm Directional (4)



Cluster Storm Rifled (4)

Total Jets




Mini Storm Directional (5)



Mini Storm Rotator (3)



Turbo Jet (1)

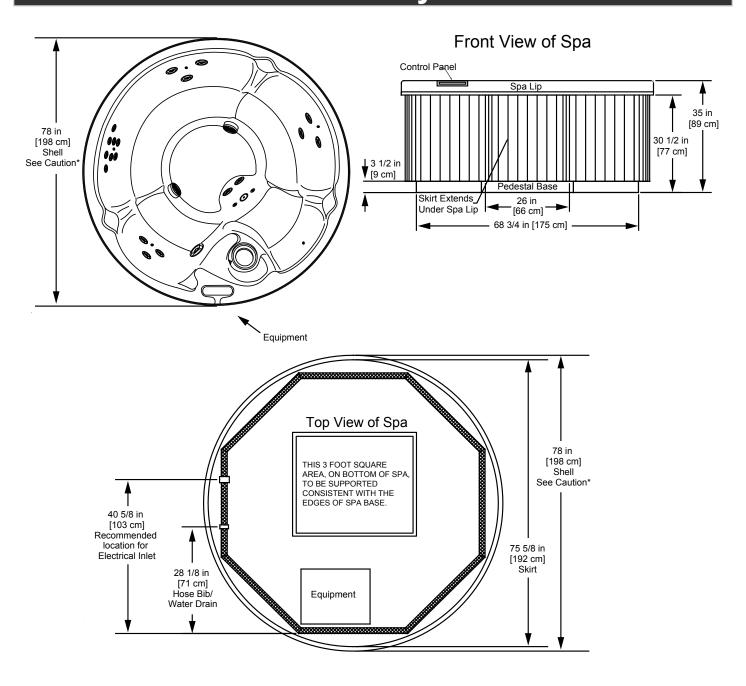

Noto:

- 1. Subject to change without notice.
- 2. Engineering specs may differ slightly from brochure.
- 3. For E-Z lifter installation allow 18" (45.7cm) clearance on the backside of the spa.
- Alternative cabinets may add significant weight. Ask your dealer for exact details.

STOP

*Caution:

Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. <u>If site planning is critical to such tolerances</u>, be sure to measure your actual spa.