
Seating Capacity	7 Adults	
Dimensions	83" x 83" x 36".	
Corner Radius	9" (23 cm)	
Dry Weight	735 lbs (333 kg)	8 8
Filled Weight (Average Fill)		
Water Capacity (Average Fill)		0.0.0
Shipping Weight		9.9
Export Shipping Weight:		0.9.0
	Programmable digital panel with LED readout	0 0.
	North America (60 Hz): 2-Speed, 3.6 HP break,	
	2.0 HP continuous, 48 Frame 2-Speed, 2.0 HP continuous	
Export (50 Hz):	2-Speed, 2.0 HP continuous	
	North America (60 Hz): 1-Speed, 3.6 HP break, 2.0 HP continuous, 48 Frame	
Export (50 Ha);	1-Speed, 2.0 HP continuous	
Circulation Pump	Optional with ClearZone Pro package	Optional
Filtration (factory default)		escutcheon jets
Heater		esculenteon jets
Export (50Hz)		
Total @Home Jets		
	2 Mini Storm Rotational, 2 Mini Storm Directional,	
	2 Power Storm Massage	
Seat 2 Jets	2 Cluster Storm Directional	
Seat 3 Jets	1 Power Storm Twirl, 2 Mini Storm Rifled, 2 Cluster Storm Directional	
	2 Cluster Storm Directional, 1 Mini Storm Rotational	
Seat 5 Jets	2 Mini Storm Directional, 2 Mini Storm Rifled, 2 Mini Storm Rotator, 2 Pillow Mini	
	Directional	
	2 Mini Storm Directional, 4 Cluster Storm Rifled	
Footwell (7)		
Massage Selectors	1 1. lat Tharany Dillow, 1. Collar Dillow, Tastila Tharany	
Water Management System	1 Jet Therapy Pillow, 1 Collar Pillow, Tactile Therapy	
	ClearZone Pro Water Purification System	
LED Lighting		
Optional		
	Adobe Tan, Stoneridge Grey, Mayan Brown,	
	Driftwood, Cherry, Summer Pine, Vintage Cedar, Midni	ght Maple
	Moonstone, UltraLife, Sand, Sunstone, Smoked Marble	
-	Desert Stone	
Headrests	4 (3 standard; 1 Jet Therapy Pillow)	
	Water fountain with independent flow rate (on or off) adjustment; powered by	
	pump 1	· · ·
Electrical Requirements:	North America (60 Hz): 240 VAC@30A or 40A	
	Export (50 Hz): 230 VAC@1x16A, 1x32A, 2x16A, 3x16A or suitably rated	
	circuit breaker to comply with local electrical codes. Certain countries may	
	require dual power inputs	
Warranty*		
	Surface, 3 Years Plumbing, 3 Years Equipment and Controls, 7 Years Cabinet,	
	1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet	
	Escutcheon, 1 Year Lights, 6 Months for Stereo; Export (50 Hz): 10 Years for UltraLife Shell Surface, 5 Years Acrylic Shell	
	Surface, 2 Years Plumbing, 2 Years Equipment and Controls, 2 Years	
	Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for	
	Jet Escutcheon, 1 Year Lights, 6 Months for Stereo	
Audio System (Optional)	Stereo system with Bluetooth capability; 2 premium spo	eakers and a subwoofer

#### **Massage Selector Diagram**

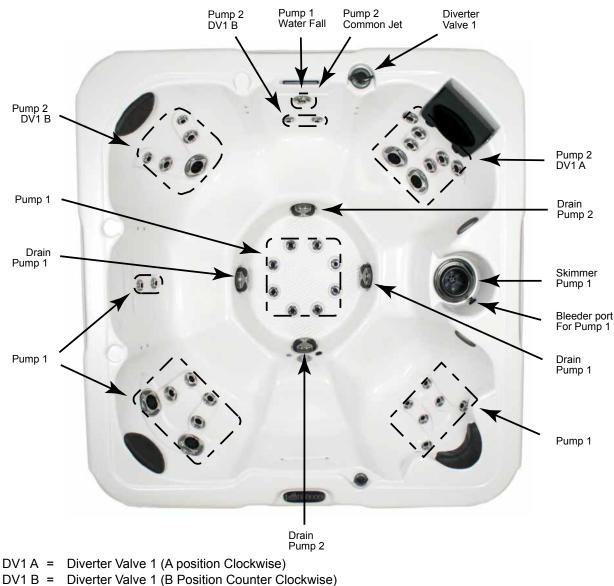

DV1 C = Diverter Valve 1 (Neutral Position)

Spa Operation Subject to Change without Notice


# Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance ± 0.5" (1.27 cm).

### **Seat Depths**

- 1 = 26.00" (66.04 cm) 2 = 26.00" (66.04 cm) 3 = 28.00" (71.12 cm) 4 = 25.00" (63.50 cm) 5 = 28.00" (71.12 cm) 6 = 26.00" (66.04 cm)
- 7 = 16.00" (40.64 cm) 8 = 29.00" (73.66 cm)


Dimensions/Specifications are Subject to Change Without Notice

#### **Jet Designation**

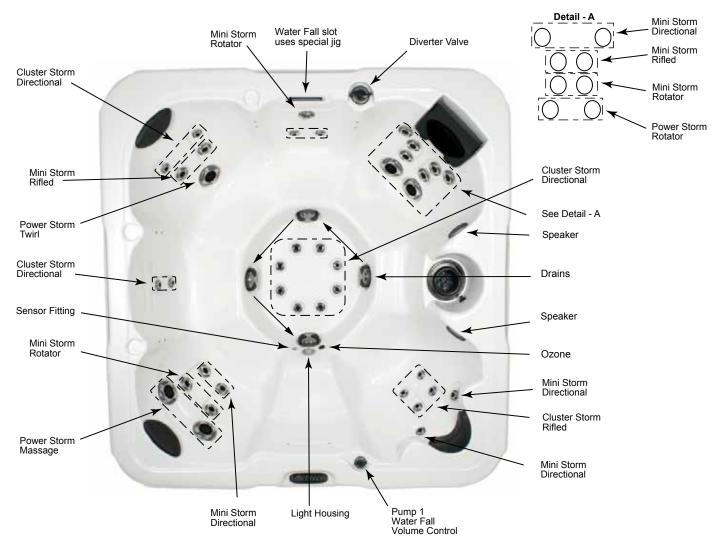

Dimensions/Operation/Specifications are Subject to Change Without Notice



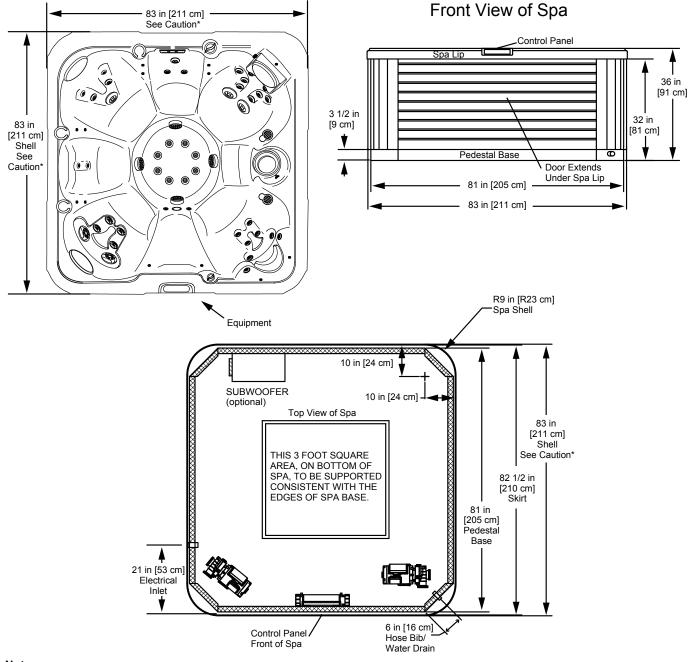

#### Note:

- 1. Subject to change without notice.
- 2. Engineering specs may differ slightly from brochure.
- For E-Z lifter installation allow 18" (45.7cm) clearance on the backside of the spa.
- Alternative cabinets may add significant weight. Ask your dealer for exact details.



\*Caution: Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. If site planning is critical to such tolerances, be sure to measure your actual spa.

Dimensions/Specifications are Subject to Change Without Notice (Tolerance ± 0.5" [1.27 cm]).