


# Triad™ 30" (with Sequencer)


Seating Capacity.....	3-4 Adults
Dimensions .....	84" x 66" x 30", (213 cm x 168 cm x 76.2 cm)
Corner Radius .....	16" (41 cm)
Dry Weight.....	609 lbs (277 kg)
Filled Weight (Average Fill) .....	2,652 lbs (1,203 kg)
Water Capacity (Average Fill).....	245 US gallons (927 Liters)
Shipping Weight .....	609 lbs (277 kg)
Export Shipping Weight:.....	<b>659 lbs (300 kg)</b>
Electronic Controls .....	D1 SmartHUB™ full color glass touch control panel; access to control jets, temperature, settings and maintenance schedule
Pump 1.....	North America (60 Hz): 1-Speed, 2.5 HP break, 2.0 HP continuous, 48 Frame
Export (50 Hz): .....	<b>1-Speed, 2.0 HP continuous</b>
Pump 2.....	North America (60 Hz): 1-Speed, 3.6 HP break, 2.5 HP continuous, 48 Frame
Export (50 Hz): .....	<b>1-Speed, 2.0 HP continuous</b>
Circulation Pump.....	Yes
Fountain Pump .....	N/A
Filtration (factory default) .....	24/7 Filtration (Purge Cycles 2 x 10 minutes)
Total VCR Jets .....	32
Seat 1 Jets .....	2 Power Storm Multi-Port, 2 Mini Storm Directional
Seat 2 Jets .....	1 Pillow Mini Rotator, 2 Pillow Cluster Shower Directional, 4 Power Storm Rotator, 4 Power Storm Directional, 6 Mini Storm Rotator, 2 Mini Storm Directional
Seat 3 Jets .....	2 Power Storm Dual Rotator, 1 Power Storm Directional, 4 Mini Storm Directional, 2 Mini Storm Rotator
Massage Selectors .....	1
Special Features .....	Tactile Therapy, Spa Status Light, Flex Therapy Pillow, Dynamic Massage Sequencer
Water Management System.....	UltraPure™ System; Two 75 ft <sup>2</sup> filter cartridge; 8" Weir
LED Lighting .....	Liquid FX
Optional .....	N/A
Synthetic Cabinet Colors .....	Adobe Tan, Stoneridge Grey, Mayan Brown
Terracina Cabinet (Optional).....	Driftwood, Coastal White, Vintage Cedar, Midnight Maple, Caramel Teak
Acrylic Colors .....	Moonstone, UltraLife™, Sand, Sunstone, Smoked Marble, Blue Topaz, Gray Marble, Desert Stone
Headrests .....	2 (1 Standard, 1 Flex Therapy Pillow)
Water Feature.....	N/A
Heater .....	2.1, 3.4, 5.5 kW
Export (50Hz) .....	<b>2.1, 3.4, 5.5 kW</b>
Electrical Requirements: .....	North America (60 Hz): 240 VAC@30A, 40A or 50A <b>Export (50 Hz): 230 VAC@1x16A, 1x32A, 2x16A, 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs</b>
Warranty*.....	North America (60 Hz): Lifetime for UltraLife Shell Surface, 7 Years Acrylic Shell Surface, 5 Years Plumbing, 5 Years Equipment and Controls, Lifetime for EnviroTect Cabinet, 7 Years for Terracina Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet Escutcheon, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz): 10 Years for UltraLife Shell Surface, 7 Years Acrylic Shell Surface, 5 Years Plumbing, 5 Years Equipment and Controls, 5 Years for EnviroTect Cabinet, 2 Years for Terracina Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet Escutcheon, 2 Years Lights, 1 Year Stereo</b>
Audio System (Optional).....	Fully Integrated Stereo System with Bluetooth capability, 4 premium speakers and a subwoofer
Wi-Fi (Optional).....	Spa-IQ™

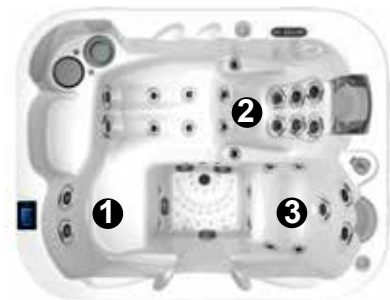

\*(See Warranty Document for Specific Details)

# Triad 30" (with Sequencer)

## Massage Selector Diagram

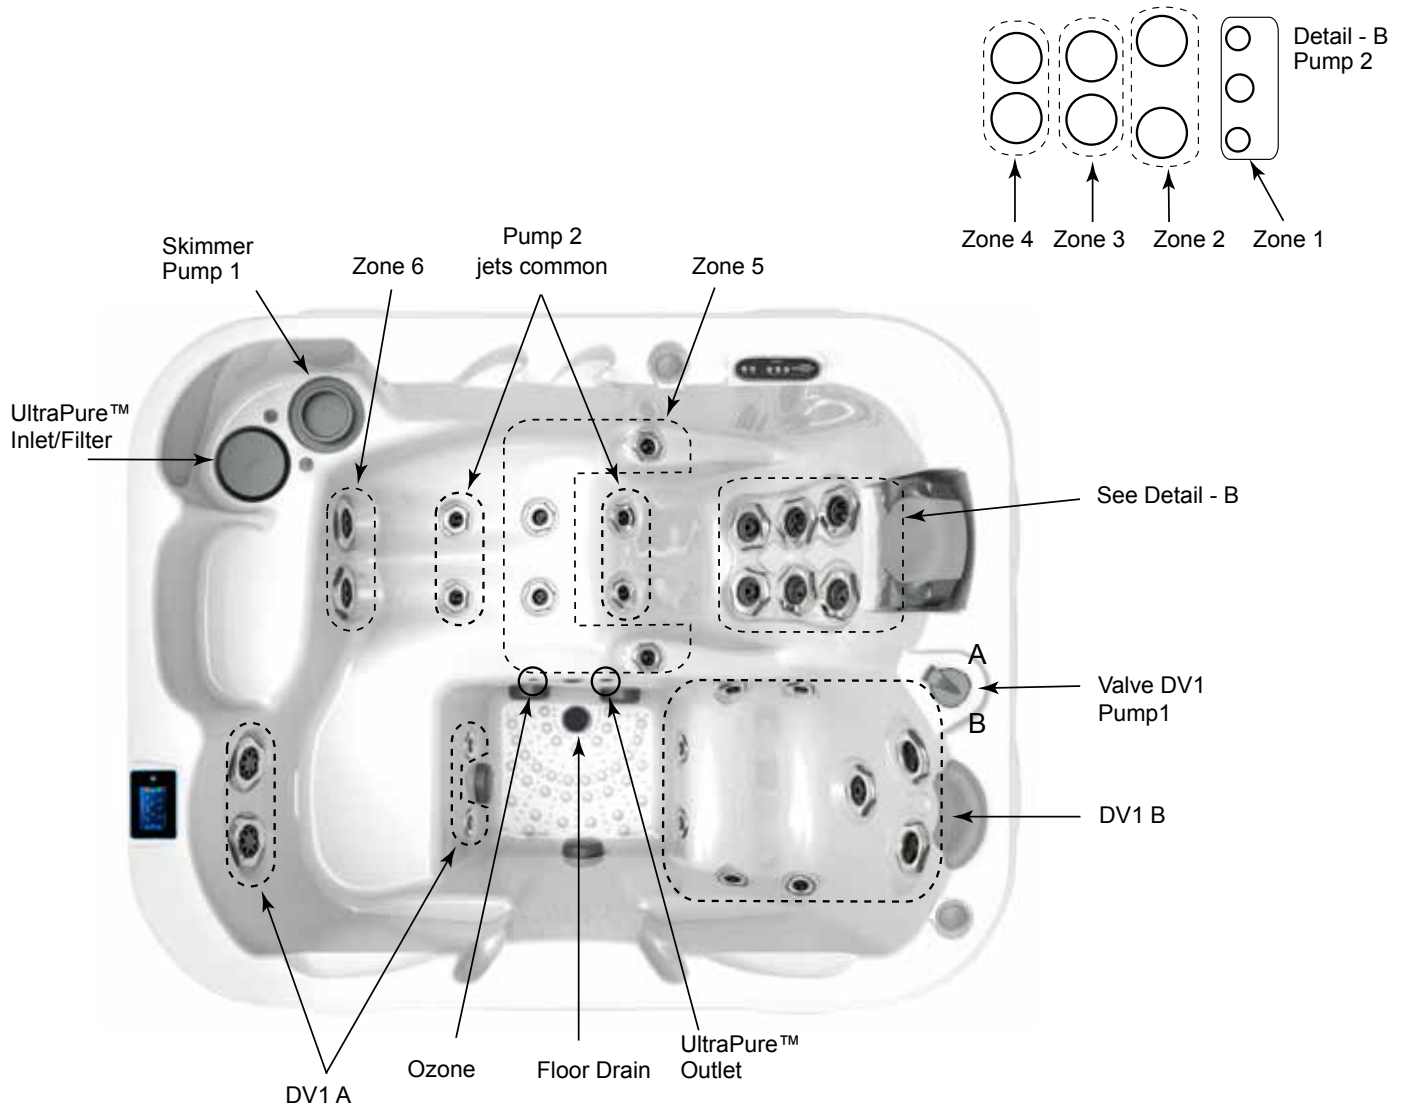

Spa Operation Subject to Change without Notice

## Seat Depths

- 1 = 18.25" (46.36 cm)**
- 2 = 10.25" (26.04 cm)**
- 3 = 26.00" (66.04 cm)**
- 4 = 26.25" (66.68 cm)**
- 5 = 27.25" (69.22 cm)**


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5" (1.27 cm).**



Dimensions/Specifications are Subject to Change Without Notice

# Triad 30" (with Sequencer)



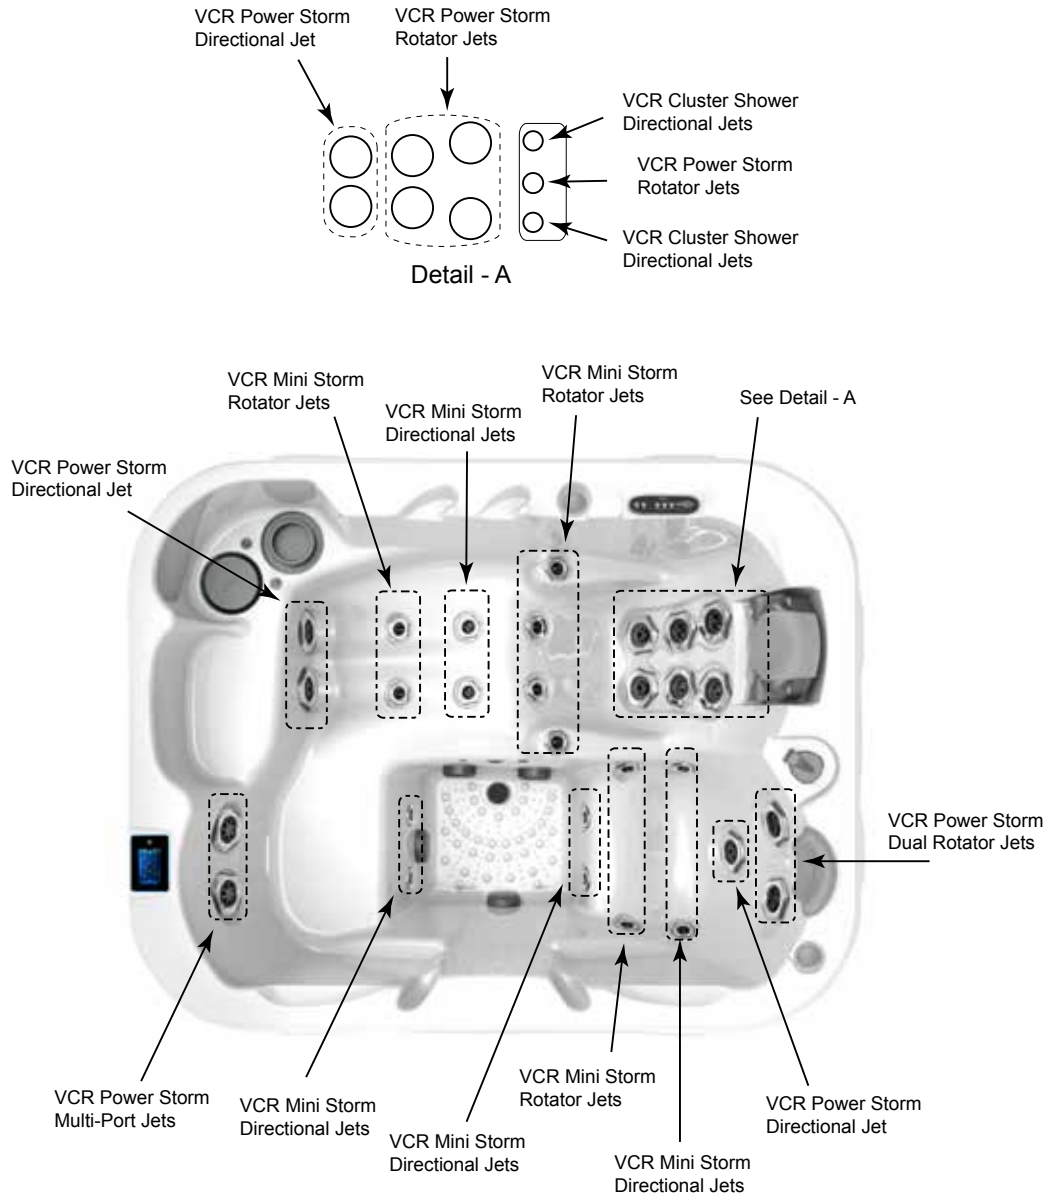






## Jet Designation






Dimensions/Operation/Specifications are Subject to Change Without Notice

### 32 Total Jets


### Total Jets

- |   |  |  |  |  |
|---|--|--|--|--|
|  Mini Storm Rotator (8)             |  Mini Storm Directional (8) |  Power Storm Rotator (4)        |  Power Storm Directional (5) |  Power Storm Dual Rotator (2) |
|  Power Storm Multi-Port Spinner (2) |  Flex Therapy Pillow (1)    |  Cluster Shower Directional (2) |  Mini Storm Rotator (1)       |  |

# Triad 30" (with Sequencer)

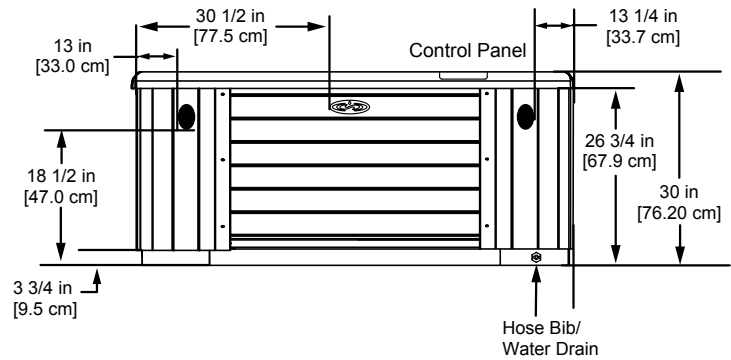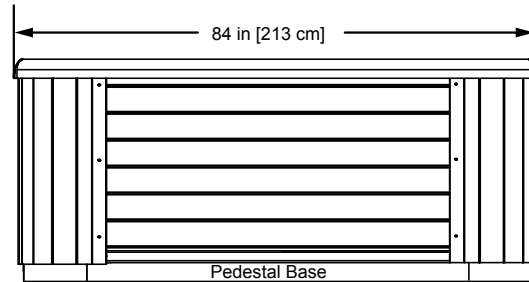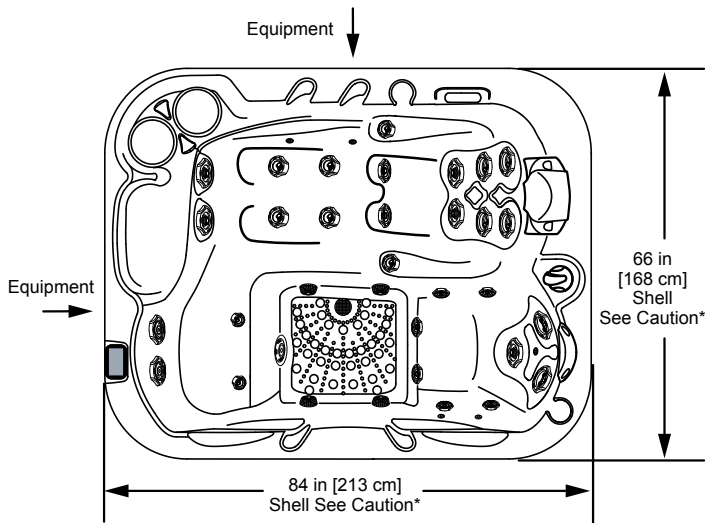

**STOP** **\*Caution:** Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. **If site planning is critical to such tolerances, be sure to measure your actual spa.**

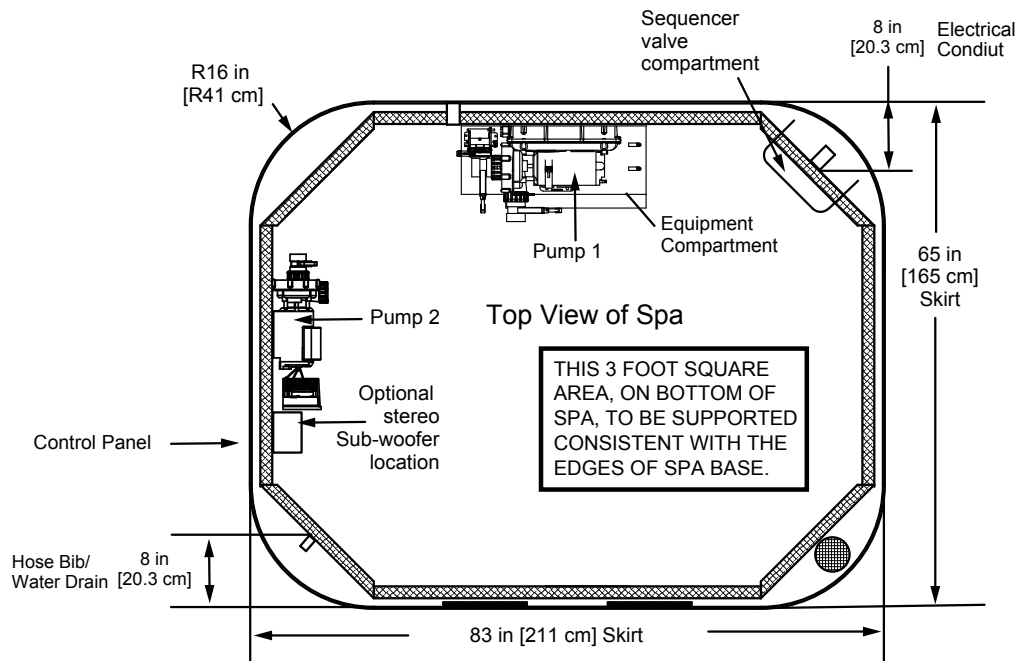

- Note:**
1. Engineering specs may differ slightly from brochure.
  2. For E-Z lifter installation allow 18" (45.7cm) clearance on the backside of the spa.
  3. Alternative cabinets may add significant weight. Ask your dealer for exact details
  4. This is the approximate location for drilling a hole if you must bring the power line in through the bottom of the spa. Be careful not to puncture a plumbing line inside the equipment compartment (drill from the inside compartment out).

Dimensions/Specifications are Subject to Change Without Notice (Tolerance  $\pm 0.5"$  [1.27 cm]).

# Triad 30" (without Sequencer)


Seating Capacity.....	3-4 Adults
Dimensions .....	84" x 66" x 30", (213 cm x 168 cm x 76.2 cm)
Corner Radius.....	16" (41 cm)
Dry Weight.....	571 lbs (260 kg)
Filled Weight (Average Fill) .....	2,614 lbs (1,186 kg)
Water Capacity (Average Fill).....	245 US gallons (927 Liters)
Shipping Weight .....	571 lbs (260 kg)
Export Shipping Weight:.....	621 lbs (282 kg)
Electronic Controls .....	D1 SmartHUB™ full color glass touch control panel; access to control jets, temperature, settings and maintenance schedule
Pump 1.....	North America (60 Hz): 1-Speed, 2.5 HP break, 2.0 HP continuous, 48 Frame
Export (50 Hz): .....	<b>1-Speed, 2.0 HP continuous</b>
Pump 2.....	North America (60 Hz): 1-Speed, 2.5 HP break, 2.0 HP continuous, 48 Frame
Export (50 Hz): .....	<b>1-Speed, 2.0 HP continuous</b>
Circulation Pump.....	Yes
Fountain Pump .....	N/A
Filtration (factory default).....	24/7 Filtration (Purge Cycles 2 x 10 minutes)
Total VCR Jets .....	32
Seat 1 Jets .....	2 Power Storm Multi-Port, 2 Mini Storm Directional
Seat 2 Jets .....	1 Pillow Mini Rotator, 2 Pillow Cluster Shower Directional, 4 Power Storm Rotator, 4 Power Storm Directional, 6 Mini Storm Rotator, 2 Mini Storm Directional
Seat 3 Jets .....	2 Power Storm Dual Rotator, 1 Power Storm Directional, 4 Mini Storm Directional, 2 Mini Storm Rotator
Massage Selectors .....	1
Special Features .....	Tactile Therapy, Spa Status Light, Flex Therapy Pillow
Water Management System.....	UltraPure™ System; Two 75 ft filter cartridge; 8" Weir
LED Lighting .....	Liquid FX
Optional .....	N/A
Synthetic Cabinet Colors.....	Adobe Tan, Stoneridge Grey, Mayan Brown
Terracina Cabinet (Optional).....	Driftwood, Coastal White, Vintage Cedar, Midnight Maple, Caramel Teak
Acrylic Colors .....	Moonstone, UltraLife™, Sand, Sunstone, Smoked Marble, Blue Topaz, Gray Marble, Desert Stone
Headrests .....	2 (1 Standard, 1 Flex Therapy Pillow)
Water Feature.....	N/A
Heater .....	2.1, 3.4, 5.5 kW
Export (50Hz) .....	<b>2.1, 3.4, 5.5 kW</b>
Electrical Requirements: .....	North America (60 Hz): 240 VAC@30A, 40A or 50A <b>Export (50 Hz): 230 VAC@1x16A, 1x32A, 2x16A, 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs</b>
Warranty*.....	North America (60 Hz): Lifetime for UltraLife Shell Surface, 7 Years Acrylic Shell Surface, 5 Years Plumbing, 5 Years Equipment and Controls, Lifetime for EnviroTect Cabinet, 7 Years for Terracina Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet Escutcheon, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz): 10 Years for UltraLife Shell Surface, 7 Years Acrylic Shell Surface, 5 Years Plumbing, 5 Years Equipment and Controls, 5 Years for EnviroTect Cabinet, 2 Years for Terracina Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet Escutcheon, 2 Years Lights, 1 Year Stereo</b>
Audio System (Optional).....	Fully Integrated Stereo System with Bluetooth capability, 4 premium speakers and a subwoofer
Wi-Fi (Optional).....	Spa-IQ™



\*(See Warranty Document for Specific Details)

# Triad 30" (without Sequencer)

## Massage Selector Diagram

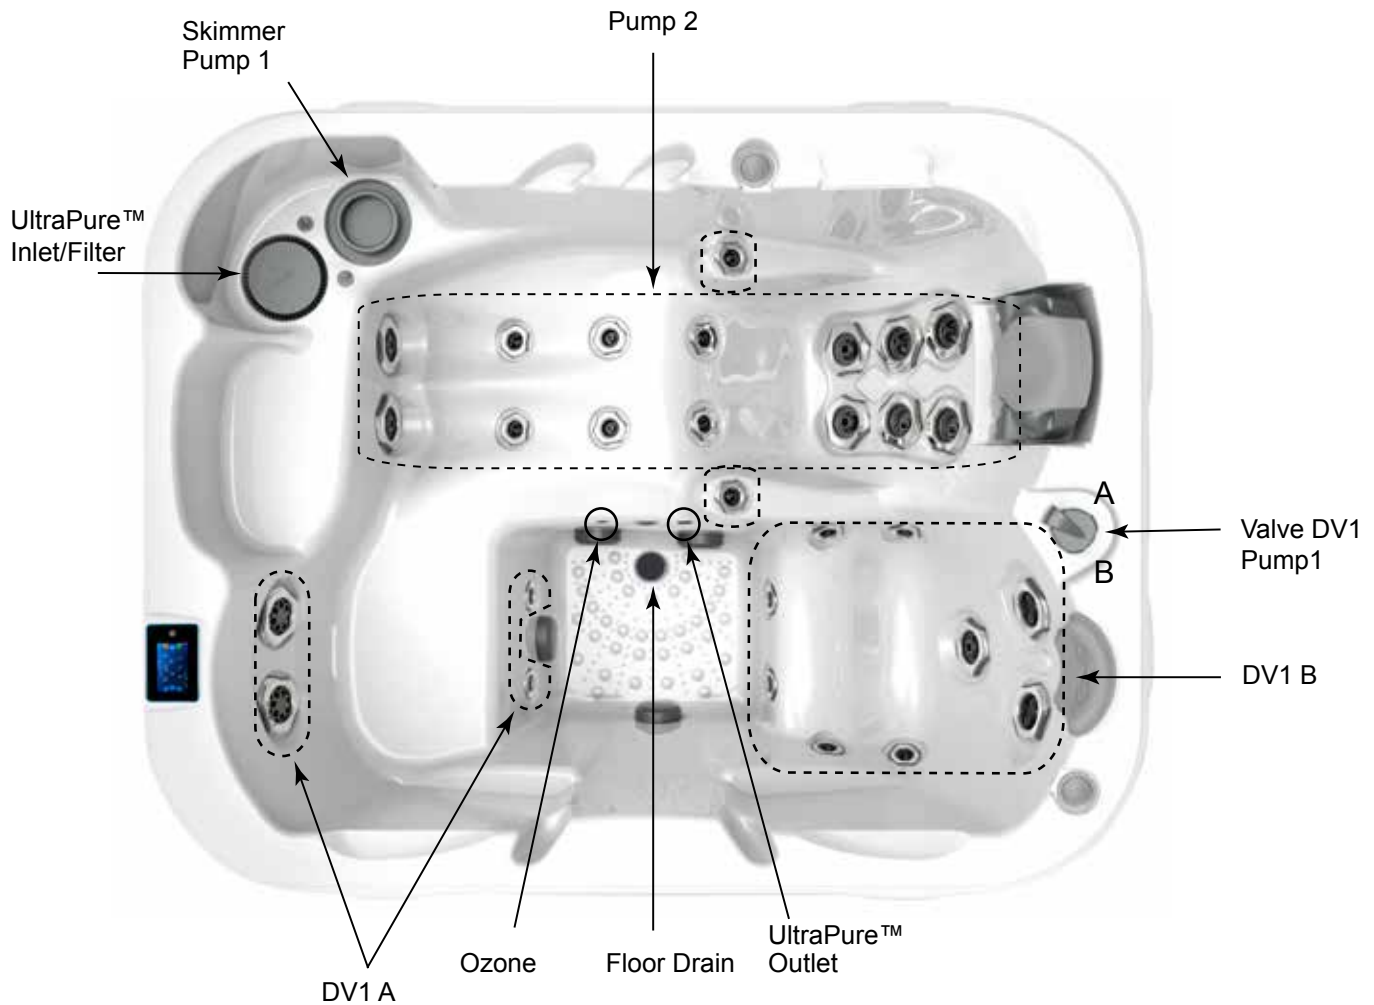

Spa Operation Subject to Change without Notice

## Seat Depths

- 1 = 18.25" (46.36 cm)
- 2 = 10.25" (26.04 cm)
- 3 = 26.00" (66.04 cm)
- 4 = 26.25" (66.68 cm)
- 5 = 27.25" (69.22 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance  $\pm 0.5"$  (1.27 cm).**



Dimensions/Specifications are Subject to Change Without Notice

# Triad 30" (without Sequencer)



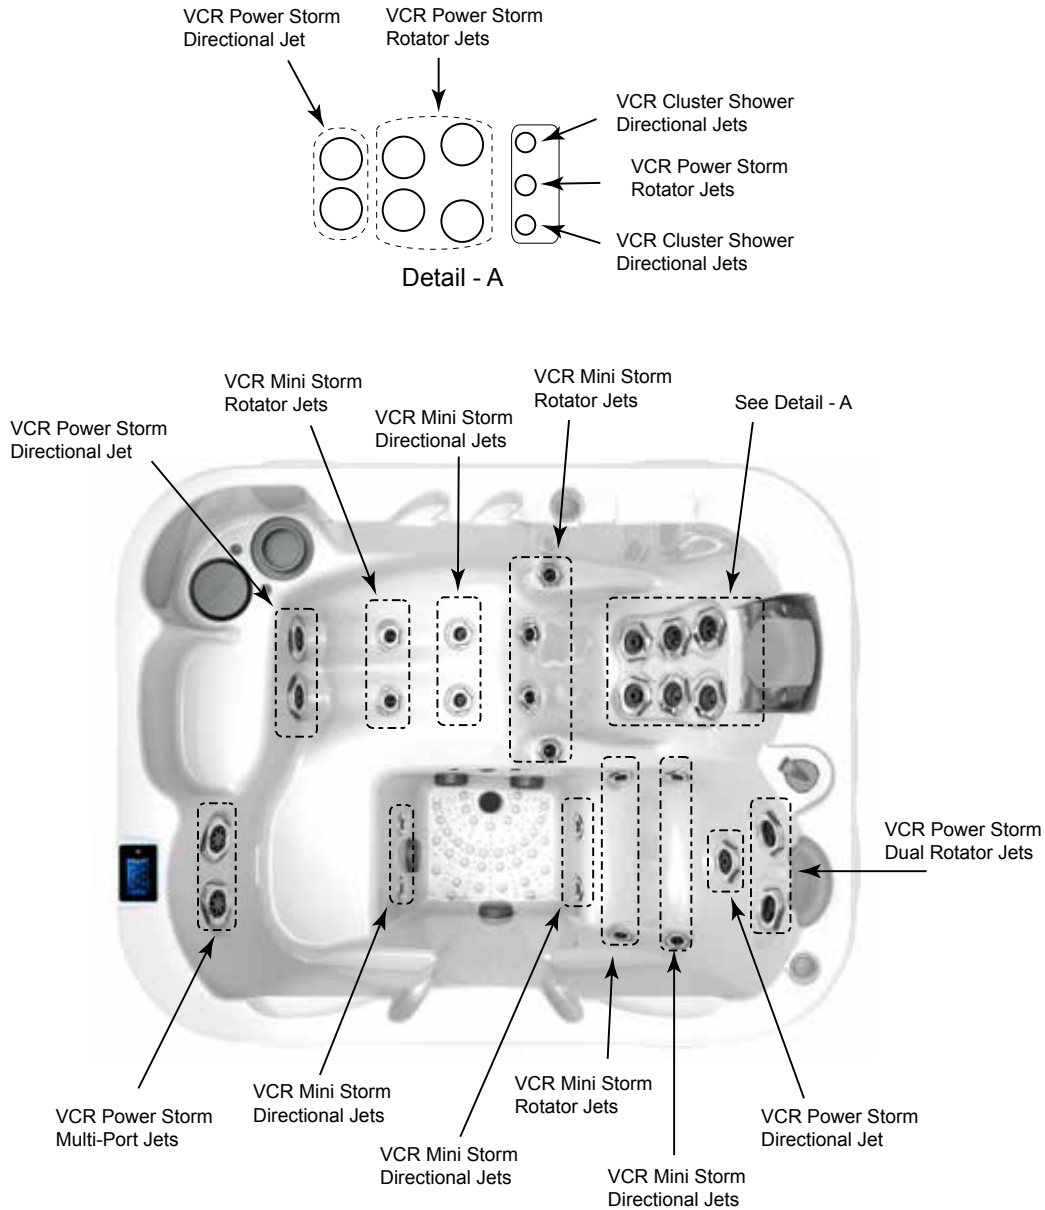






## Jet Designation






Dimensions/Operation/Specifications are Subject to Change Without Notice

### 32 Total Jets

### Total Jets


- |   |  |  |  |  |
|---|--|--|--|--|
|  Mini Storm Rotator (8)             |  Mini Storm Directional (8) |  Power Storm Rotator (4)        |  Power Storm Directional (5) |  Power Storm Dual Rotator (2) |
|  Power Storm Multi-Port Spinner (2) |  Flex Therapy Pillow (1)    |  Cluster Shower Directional (2) |  Mini Storm Rotator (1)       |  |

# Triad 30" (without Sequencer)

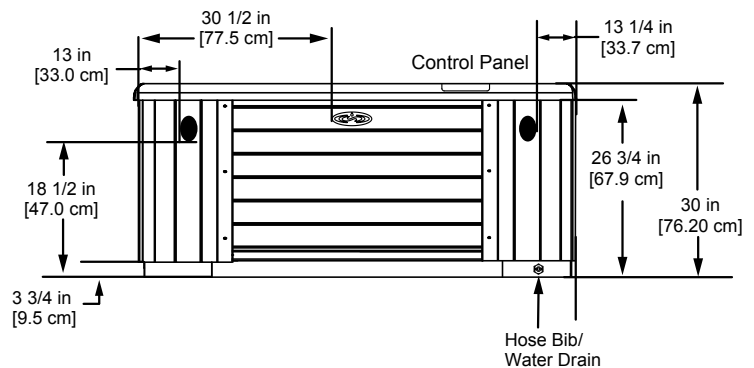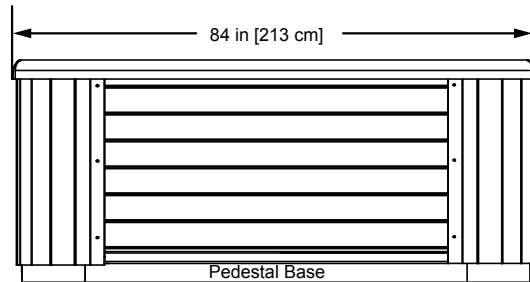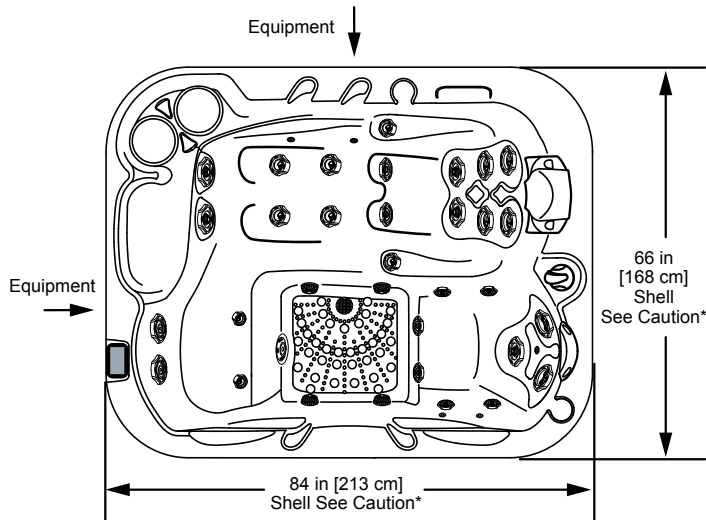

**STOP**

**\*Caution:**  
Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above.  
**If site planning is critical to such tolerances, be sure to measure your actual spa.**

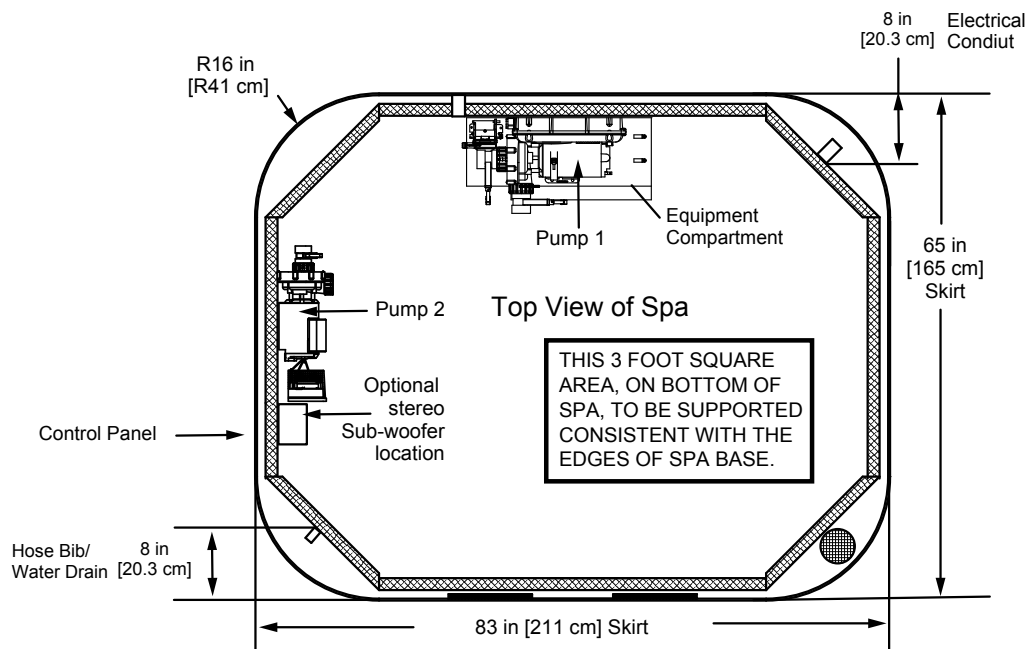

- Note:**
1. Engineering specs may differ slightly from brochure.
  2. For E-Z lifter installation allow 18" (45.7cm) clearance on the backside of the spa.
  3. Alternative cabinets may add significant weight. Ask your dealer for exact details
  4. This is the approximate location for drilling a hole if you must bring the power line in through the bottom of the spa. Be careful not to puncture a plumbing line inside the equipment compartment (drill from the inside compartment out).

Dimensions/Specifications are Subject to Change Without Notice (Tolerance  $\pm 0.5"$  [1.27 cm]).